

DROP FORGED EYE BOLTS


MACHINE THREAD (As noted on page 14)



- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements.
- Material traceability available through Product Identification Code (PIC) System

WARNING:

Any deviations such as angular lifts, shock loads, modification of the basic forging, etc., will result in drastically reduced working load limits.

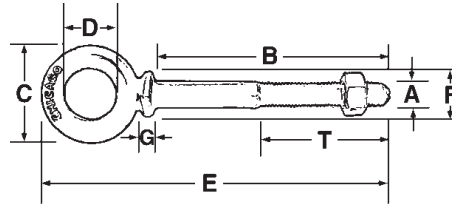

SHOULDER

Diameter (A) & Shank Length (B)	Part No.	Dimensions – Inches						Weight Per 100 pcs	Working Load Limit†
		Outside Eye (C)	Inside Eye (D)	Overall Length (E)	Outside Shoulder (F)	Thickness at Shoulder (G)	Thread Length (T)		
1/4" x 2	08405 5	1"	1/2"	3-1/8"	7/16"	5/64"	1-1/2"	7.4	500
1/4" x 3	08408 6	1"	1/2"	4-1/8"	7/16"	5/64"	1-1/2"	9	500
1/4" x 4	08411 6	1"	1/2"	5-1/8"	7/16"	5/64"	2"	10.7	500
5/16" x 2-1/4"	08422 2	1-1/4"	5/8"	3-5/8"	9/16"	3/32"	1-1/2"	12.9	800
5/16" x 3-1/4"	08425 3	1-1/4"	5/8"	4-5/8"	9/16"	3/32"	1-1/2"	16	800
5/16" x 4-1/4"	08428 4	1-1/4"	5/8"	5-5/8"	9/16"	3/32"	2-1/2"	16.8	800
3/8" x 2-1/2"	08439 0	1-1/2"	3/4"	4-1/4"	11/16"	1/8"	1-1/2"	21	1200
3/8" x 3"	08442 0	1-1/2"	3/4"	4-3/4"	11/16"	1/8"	1-1/2"	23	1200
3/8" x 4-1/2"	08445 1	1-1/2"	3/4"	6-1/4"	11/16"	1/8"	2"	29	1200
3/8" x 5	08448 2	1-1/2"	3/4"	6-3/4"	11/16"	1/8"	2-1/2"	29	1200
3/8" x 6	08451 2	1-1/2"	3/4"	7-3/4"	11/16"	1/8"	3"	32	1200
3/8" x 8	08454 3	1-1/2"	3/4"	9-3/4"	11/16"	1/8"	4"	37	1200
1/2" x 2"	08459 8	2"	1"	4-5/16"	7/8"	5/32"	1-7/8"	44	2200
1/2" x 3-1/4"	08462 8	2"	1"	5-1/2"	7/8"	5/32"	1-1/2"	46	2200
1/2" x 4-1/2"	08465 9	2"	1"	6-3/4"	7/8"	5/32"	2"	60	2200
1/2" x 6"	08468 0	2"	1"	8-1/4"	7/8"	5/32"	3"	64	2200
1/2" x 8"	08471 0	2"	1"	10-1/4"	7/8"	5/32"	4"	78	2200
1/2" x 10"	08474 1	2"	1"	12-1/4"	7/8"	5/32"	4"	89	2200
1/2" x 12"	08477 2	2"	1"	14-1/4"	7/8"	5/32"	4"	103	2200
5/8" x 4-1/2"	08482 6	2-5/16"	1-1/4"	7-1/4"	1-1/8"	13/64"	2"	99	3500
5/8" x 6"	08485 7	2-5/16"	1-1/4"	8-9/16"	1-1/8"	13/64"	3"	103	3500
5/8" x 8"	08488 8	2-5/16"	1-1/4"	10-9/16"	1-1/8"	13/64"	4"	124	3500
5/8" x 10"	08491 8	2-5/16"	1-1/4"	12-9/16"	1-1/8"	13/64"	4"	142	3500
5/8" x 12"	08494 9	2-5/16"	1-1/4"	14-9/16"	1-1/8"	13/64"	4"	160	3500
3/4" x 4-1/2"	08508 3	2-3/4"	1-1/2"	7-3/4"	1-3/8"	1/4"	2-1/2"	152	5200
3/4" x 6"	08511 3	2-3/4"	1-1/2"	9-1/8"	1-3/8"	1/4"	3"	166	5200
7/8" x 5"	08534 2	3-1/2"	1-3/4"	9-1/4"	1-1/2"	9/32"	2-1/2"	222	7200
7/8" x 8"	08537 3	3-1/2"	1-3/4"	12-1/8"	1-1/2"	9/32"	4"	269	7200
1" x 6"	08551 9	3-3/4"	2"	10-1/2"	1-3/4"	5/16"	3"	331	10000
1" x 9"	08554 0	3-3/4"	2"	13-1/4"	1-3/4"	5/16"	4"	404	10000



NOTE:
Hex Nuts are imported

† Loads are based on a design factor of 5 to 1. Some sizes also available in Stainless Steel. See page 41. Special shank and thread lengths are also available.