


SELF-LOCKING HOOKS - LKBK SWIVEL EYE GRIP LATCH (WITH BALL BEARINGS)


| Model | Chain Size In | Grade | Working Load Limit* (lbs) | Dimensions (inches) | | | | | | | Weight Each (lbs) |
|-------------|---------------|-------|---------------------------|---------------------|-----|-----|-----|------|------|------|-------------------|
| | | | | L | B | C | E | F | G | H | |
| LKBK-7/8-10 | 9/32 | 100 | 4,300 | 6.9 | 1.5 | 1.1 | 1.5 | 0.47 | 0.79 | 0.87 | 1.8 |
| LKBK-7/8-10 | 5/16 | 100 | 5,700 | 6.9 | 1.5 | 1.1 | 1.5 | 0.47 | 0.79 | 0.87 | 1.8 |
| LKBK-10-10 | 3/8 | 100 | 8,800 | 8.4 | 1.9 | 1.4 | 1.7 | 0.59 | 0.87 | 1.1 | 4.0 |
| LKBK-13-10 | 1/2 | 100 | 15,000 | 9.3 | 2.1 | 1.9 | 1.9 | 0.75 | 1.1 | 1.4 | 8.4 |
| LKBK-16-10 | 5/8 | 100 | 22,600 | 12.6 | 2.7 | 2.4 | 2.4 | 0.91 | 1.1 | 1.7 | 13.2 |

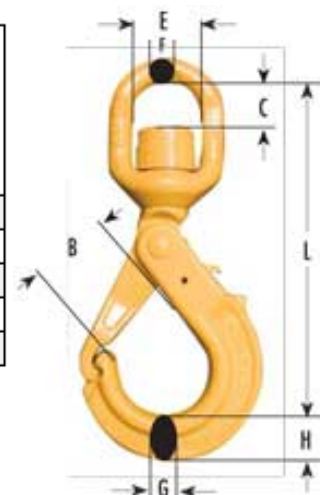

*Design factor 4:1 Proof tested and certified

SELF-LOCKING HOOKS - BKL WITH BRONZE BUSHINGS (SWIVEL EYE TYPE)


| Model | Chain Size In | Grade** | Working Load Limit* (lbs) | Dimensions (inches) | | | | | | | Weight Each (lbs) |
|--------------|---------------|---------|---------------------------|---------------------|-----|-----|-----|------|------|------|-------------------|
| | | | | L | B | C | E | F | G | H | |
| BKL-6-10 | 7/32 | 100 | 2,700 | 5.9 | 1.1 | 0.9 | 1.3 | 0.43 | 0.59 | 0.83 | 1.5 |
| BKL-7/8-10 | 9/32 | 100 | 4,300 | 7.2 | 1.5 | 1.1 | 1.5 | 0.47 | 0.67 | 1.0 | 2.6 |
| BKL-7/8-10 | 5/16 | 100 | 5,700 | 7.2 | 1.5 | 1.1 | 1.5 | 0.47 | 0.67 | 1.0 | 2.6 |
| BKL-10-10 | 3/8 | 100 | 8,800 | 8.6 | 1.7 | 1.4 | 1.7 | 0.59 | 0.83 | 1.2 | 4.4 |
| BKL-13-10 | 1/2 | 100 | 15,000 | 11.0 | 2.1 | 1.9 | 1.9 | 0.75 | 1.2 | 1.5 | 8.4 |
| BKL-16-10 | 5/8 | 100 | 22,600 | 13.5 | 2.4 | 2.6 | 2.6 | 0.87 | 1.5 | 1.9 | 15.6 |
| BKL-18/20-10 | 3/4 | 100 | 35,300 | 14.4 | 2.7 | 2.8 | 2.8 | 1.0 | 1.7 | 2.5 | 24.5 |

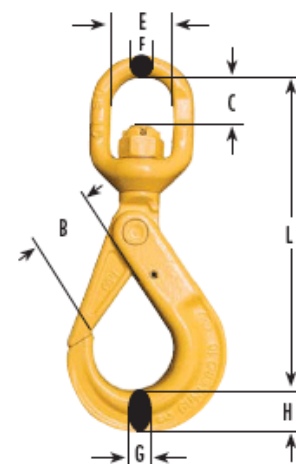

*Design factor 4:1 Proof tested and certified
 **Grade 100 hooks have recessed trigger
 Note: hook may not be swiveled when under load

SELF-LOCKING HOOKS - BKLK WITH BALL BEARINGS (SWIVEL EYE TYPE)

| Model | Chain Size In | Grade** | Working Load Limit* (lbs) | Dimensions (in) | | | | | | | Weight Each (lbs) |
|---------------|---------------|---------|---------------------------|-----------------|-----|------|-----|------|------|------|-------------------|
| | | | | L | B | C | E | F | G | H | |
| BKLK-6-10 | 7/32 | 100 | 2,700 | 5.9 | 1.1 | 0.94 | 1.3 | 0.43 | 0.59 | 0.83 | 1.5 |
| BKLK-7/8-10 | 9/32 | 100 | 4,300 | 7.2 | 1.5 | 1.1 | 1.5 | 0.47 | 0.67 | 1.0 | 2.6 |
| BKLK7/8-10 | 5/16 | 100 | 5,700 | 7.2 | 1.5 | 1.1 | 1.5 | 0.47 | 0.67 | 1.0 | 2.6 |
| BKLK10-10 | 3/8 | 100 | 8,800 | 8.6 | 1.7 | 1.4 | 1.7 | 0.59 | 0.83 | 1.2 | 4.2 |
| BKLK-13-10 | 1/2 | 100 | 15,000 | 11.0 | 2.1 | 1.8 | 1.9 | 0.75 | 1.2 | 1.5 | 8.4 |
| BKLK-16-10 | 5/8 | 100 | 22,600 | 13.3 | 2.5 | 2.5 | 2.4 | 0.87 | 1.5 | 1.9 | 15.9 |
| BKLK-18/20-10 | 3/4 | 100 | 35,300 | 14.4 | 2.7 | 2.3 | 2.9 | 1.0 | 1.7 | 2.5 | 24.9 |

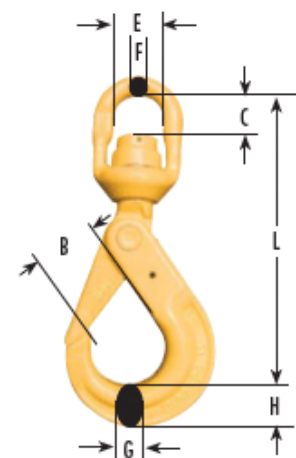

*Design factor 4:1 Proof tested and certified
 **Grade 100 hooks have reced trigger


MASTER GRAB TYPE MG

Chain Fittings

An all in one fitting, combining master link, connector and shortening function for single leg sling.

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) | L (in) | A | B | H | Weight Each (Lbs) |
|-----------|----------|----------------|----------------------------|--------|-----|-----|------|-------------------|
| 590556 | MG-6-10 | 7/32" | 2,700 | 5.7 | 3.5 | 2.3 | 0.59 | 1.1 |
| 589406 | MG-8-10 | 5/16" | 5,700 | 6.7 | 3.6 | 2.4 | 0.71 | 2.0 |
| 589407 | MG-10-10 | 3/8" | 8,800 | 8.3 | 4.4 | 3.0 | 0.87 | 4.0 |
| 589408 | MG-13-10 | 1/2" | 15,000 | 10.3 | 5.4 | 3.5 | 1.0 | 7.7 |
| 589409 | MG-16-10 | 5/8" | 22,600 | 12.2 | 6.2 | 4.1 | 1.2 | 13.4 |

*Design factor 4

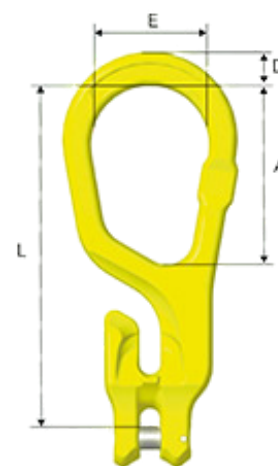


MASTER GRAB DUAL TYPE MGD

An all in one fitting, combining master link, connector and shortening function for a two leg sling.

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) at 60° | L (in) | A | B | H | Weight Each (Lbs) |
|-----------|-----------|----------------|-----------------------------------|--------|-----|-----|------|-------------------|
| 590557 | MGD-6-10 | 7/32" | 4,700 | 5.7 | 3.5 | 2.4 | 0.67 | 1.5 |
| 589410 | MGD-8-10 | 5/16" | 9,900 | 6.7 | 3.9 | 3.0 | 0.83 | 2.9 |
| 589411 | MGD-10-10 | 3/8" | 15,200 | 8.3 | 4.9 | 3.5 | 0.94 | 5.1 |
| 589412 | MGD-13-10 | 1/2" | 26,000 | 10.3 | 5.9 | 4.1 | 1.2 | 11.5 |
| 589413 | MGD-16-10 | 5/8" | 39,100 | 12.2 | 6.9 | 4.7 | 1.4 | 17.4 |

*Design factor 4

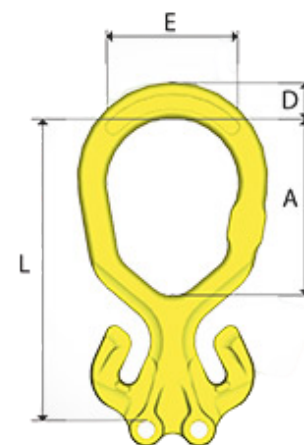

OBLONG MASTER LINK MF

For 1, 2, 3, or 4 leg chain slings when used with C-Grab and C-Lok connectors

| Stock No. | Model | Trade Size (in) | 1-Leg 90° | Working Load Limit * (lbs) | 2-Legs 60° | Working Load Limit * (lbs) | 3-4 Legs 60° | Working Load Limit * (lbs) | L | B | D | Weight Each (Lbs) |
|-----------|------------|-----------------|-----------|----------------------------|------------|----------------------------|--------------|----------------------------|-----|-----|------|-------------------|
| 590555 | MF-6-10 | 7/16" | - | 2,700 | - | 2,700 | - | - | 3.9 | 2.4 | 0.43 | 0.5 |
| 589385 | MF-86-10 | 1/2" | 5/16" | 5,700 | - | - | - | - | 4.9 | 2.8 | 0.55 | 0.9 |
| 589386 | MF-108-10 | 5/8" | 3/8" | 8,800 | 5/16" | 9,900 | - | - | 5.5 | 3.1 | 0.67 | 1.8 |
| 589387 | MF-1310-10 | 7/8" | 1/2" | 15,000 | 3/8" | 15,200 | 5/16" | 14,800 | 6.3 | 3.7 | 0.87 | 3.3 |
| 589388 | MF-1613-10 | 1" | 5/8" | 22,600 | 1/2" | 26,000 | 3/8" | 22,900 | 7.5 | 4.3 | 1.1 | 4.8 |
| 589389 | MF-2016-10 | 1 3/8" | - | - | 5/8" | 39,100 | 1/2" | 39,000 | 9.4 | 5.5 | 1.3 | 11.5 |
| 589505 | MF-2220-10 | 1 1/2" | - | - | - | - | 5/8" | 58,700 | 9.8 | 5.9 | 1.6 | 16.1 |

*Design factor 4



the
carpenter
group


GrabIQ™

C GRAB TYPE CG

Chain Fittings

A connecting link used with MF, MFX, or MFH master links to attach one leg of chain. Can also be used as an adjustable sliding choker. Fitting includes built-in chain pocket for shortening or creating leg loops

| Stock No. | Model | Chain Size(in) | Load Limit * (Lbs) at 90° | L | B | E | H | Weight Each (Lbs) |
|-----------|----------|----------------|---------------------------|-----|------|-----|------|-------------------|
| 590558 | CG-6-10 | 7/32" | 2,700 | 3.1 | 0.43 | 0.9 | 0.87 | 1.1 |
| 589398 | CG-8-10 | 5/16" | 5,700 | 4.2 | 0.47 | 1.3 | 0.9 | 1.5 |
| 589399 | CG-10-10 | 3/8" | 8,800 | 5.3 | 0.59 | 1.6 | 1.1 | 3.3 |
| 589400 | CG-13-10 | 1/2" | 15,000 | 6.8 | 0.75 | 2.0 | 1.5 | 7.1 |
| 589401 | CG-16-10 | 5/8" | 22,600 | 8.5 | 0.87 | 2.5 | 1.9 | 13.4 |

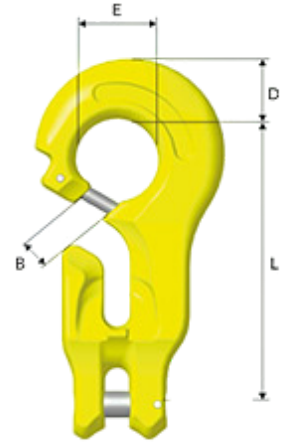


*Design factor 4

C GRAB DUAL TYPE CGD

- A connecting link used with MF, MFX, or MFH master links to attach two legs of chain. Fitting includes built-in chain pockets for shortening or creating leg loops.

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) at 60° | L | B | E | H | Weight Each (Lbs) |
|-----------|-----------|----------------|-----------------------------------|-----|------|------|------|-------------------|
| 590559 | CGD-6-10 | 7/32" | 4,700 | 3.1 | 0.43 | 0.94 | 0.87 | 1.1 |
| 589402 | CGD-8-10 | 5/16" | 9,900 | 4.2 | 0.47 | 1.3 | 1.1 | 2.4 |
| 589403 | CGD-10-10 | 3/8" | 15,200 | 5.3 | 0.59 | 1.6 | 1.5 | 4.8 |
| 589404 | CGD-13-10 | 1/2" | 26,000 | 6.8 | 0.75 | 1.9 | 1.9 | 11.9 |
| 589405 | CGD-16-10 | 5/8" | 39,100 | 8.5 | 0.87 | 2.5 | 2.2 | 20.1 |

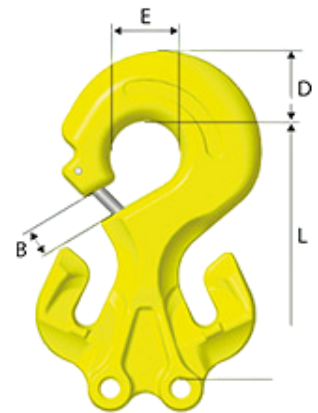


*Design factor 4

C-LOK TYPE CL

A connecting link used with MF, MFX, or MFH master links to attach one leg of chain. The C-Lok can also be used at the bottom of a sling as a sliding choker.

| Stock No. | Model | Chain Size(in) | Load Limit * (Lbs) at 90° | L | B | E | H | Weight Each (Lbs) |
|-----------|----------|----------------|---------------------------|-----|------|------|-----|-------------------|
| 590560 | CL-6-10 | 7/32" | 2,700 | 1.7 | 0.43 | 0.94 | 0.7 | 0.5 |
| 589390 | CL-8-10 | 5/16" | 5,700 | 2.3 | 0.47 | 1.3 | 0.9 | 1.1 |
| 589391 | CL-10-10 | 3/8" | 8,800 | 2.9 | 0.59 | 1.6 | 1.1 | 2.2 |
| 589392 | CL-13-10 | 1/2" | 15,000 | 3.7 | 0.71 | 2.0 | 1.5 | 4.4 |
| 589393 | CL-16-10 | 5/8" | 22,600 | 4.7 | 0.87 | 2.5 | 1.9 | 8.4 |

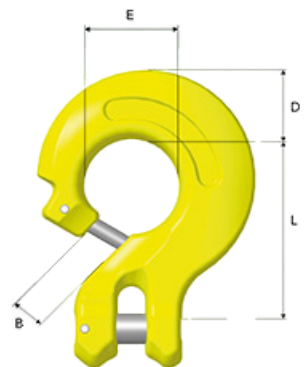

*Design factor 4



the
carpenter
group


GrabIQ™

EGKN SLING HOOK

Chain Fittings

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) at 90° | L | B | G | H | Weight Each (Lbs) |
|-----------|------------|----------------|-----------------------------------|-----|------|------|------|-------------------|
| 589710 | EGKN-6-10 | 7/32" | 2,700 | 3.4 | 0.94 | 0.67 | 0.79 | 0.9 |
| 589713 | EGKN-8-10 | 5/16" | 5,700 | 3.7 | 1.1 | 0.67 | 0.87 | 1.1 |
| 589714 | EGKN-10-10 | 3/8" | 8,800 | 4.8 | 1.4 | 0.91 | 1.2 | 2.2 |
| 589715 | EGKN-13-10 | 1/2" | 15,000 | 5.7 | 1.7 | 1.1 | 1.5 | 5.1 |
| 589716 | EGKN-16-10 | 5/8" | 22,600 | 6.7 | 2.0 | 1.4 | 1.8 | 8.4 |


*Design factor 4

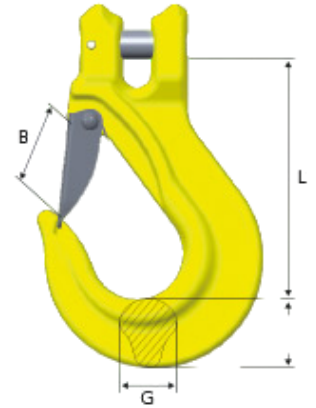

OKE FOUNDRY HOOK (EYE TYPE)

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) | L | B | E | F | G | H | Weight Each (Lbs) |
|-----------|------------|----------------|----------------------------|-----|-----|-----|------|------|-----|-------------------|
| 589725 | OKE-7/8-10 | 5/16" | 5,700 | 4.8 | 2.5 | 1.1 | 0.45 | 0.79 | 1.0 | 1.5 |
| 589727 | OKE-10-10 | 3/8" | 8,800 | 5.9 | 3.0 | 1.3 | 0.59 | 1.0 | 1.1 | 2.9 |
| 589728 | OKE-13-10 | 1/2" | 15,000 | 7.2 | 3.5 | 1.7 | 0.75 | 1.3 | 1.5 | 6.2 |
| 589729 | OKE-16-10 | 5/8" | 22,600 | 8.5 | 4.0 | 2.2 | 0.91 | 1.6 | 1.8 | 10.8 |


*Design factor 4:1

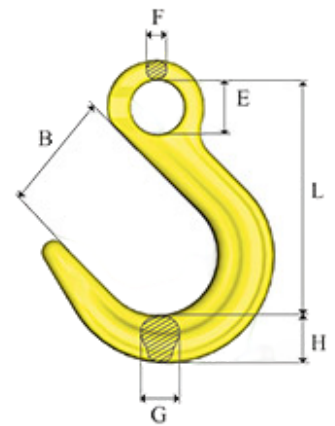

GG GRAB HOOK (CLEVIS CRADLE TYPE)

| Stock No. | Model | Chain Size(in) | Working Load Limit * (Lbs) | L | B | Weight Each (Lbs) |
|-----------|----------|----------------|----------------------------|-----|------|-------------------|
| 589687 | GG-8-10 | 5/16" | 5,700 | 2.2 | 0.41 | 0.88 |
| 589688 | GG-10-10 | 3/8" | 8,800 | 3.3 | 0.47 | 2.0 |
| 589689 | GG-13-10 | 1/2" | 15,000 | 3.8 | 0.63 | 4.0 |
| 589690 | GG-16-10 | 5/8" | 22,600 | 4.9 | 0.79 | 6.8 |

*Design factor 4:1

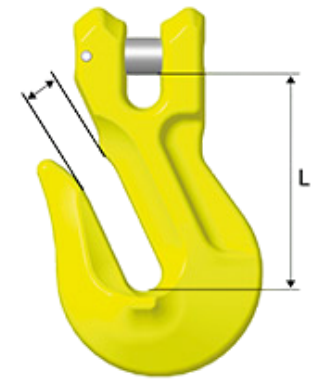


the
carpenter
group

GrabIQ™

| Stock No. | Model | Chain Size(in) | Working Load Limit* (Lbs) at 90° | L | B | G | H | Weight Each (Lbs) |
|-----------|-----------|----------------|----------------------------------|-----|-----|------|------|-------------------|
| 589735 | GBK-6-10 | 7/32" | 2,700 | 3.4 | 1.0 | 0.59 | 0.67 | 0.8 |
| 589739 | GBK-8-10 | 5/16" | 5,700 | 4.7 | 1.5 | 0.79 | 0.87 | 1.8 |
| 589740 | GBK-10-10 | 3/8" | 8,800 | 5.9 | 1.9 | 0.83 | 1.2 | 3.1 |
| 589741 | GBK-13-10 | 1/2" | 15,000 | 6.8 | 2.1 | 1.2 | 1.5 | 6.0 |
| 589742 | GBK-16-10 | 5/8" | 22,600 | 8.1 | 2.4 | 1.5 | 1.9 | 9.7 |


*Design factor 4

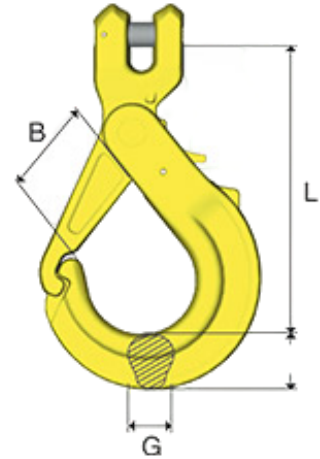

LBK SWIVEL EYE GRIP LATCH SELF-LOCKING HOOK (WITH BRONZE BUSHING)

| Stock No. | Model | Chain Size(in) | Working Load Limit* (Lbs) | L | B | C | E | F | G | H | Weight Each (Lbs) |
|-----------|------------|----------------|---------------------------|------|-----|-----|-----|------|------|------|-------------------|
| 589751 | LBK-7/8-10 | 5/16" | 5,700 | 6.9 | 1.5 | 1.1 | 1.5 | 0.47 | 0.79 | 0.87 | 1.8 |
| 589753 | LBK-10-10 | 3/8" | 8,800 | 8.4 | 1.9 | 1.4 | 1.7 | 0.59 | 0.87 | 1.1 | 4.0 |
| 589754 | LBK-13-10 | 1/2" | 15,000 | 9.3 | 2.1 | 1.9 | 1.9 | 0.75 | 1.1 | 1.4 | 8.4 |
| 589755 | LBK-16-10 | 5/8" | 22,600 | 12.8 | 2.7 | 2.6 | 2.4 | 0.91 | 1.1 | 1.7 | 13.2 |

*Design factor 4:1

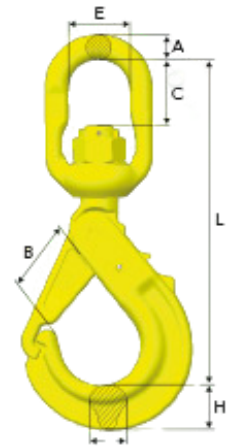

LBK SWIVEL EYE GRIP LATCH SELF-LOCKING HOOK (WITH BALL BEARINGS)

| Model | Chain Size In | Grade | Working Load Limit* (lbs) | Dimensions (inches) | | | | | | | Weight Each (lbs) |
|-------------|---------------|-------|---------------------------|---------------------|-----|-----|-----|------|------|------|-------------------|
| | | | | L | B | C | E | F | G | H | |
| LKBK-7/8-10 | 9/32 | 100 | 4,300 | 6.9 | 1.5 | 1.1 | 1.5 | 0.47 | 0.79 | 0.87 | 1.8 |
| LKBK-7/8-10 | 5/16 | 100 | 5,700 | 6.9 | 1.5 | 1.1 | 1.5 | 0.47 | 0.79 | 0.87 | 1.8 |
| LKBK-10-10 | 3/8 | 100 | 8,800 | 8.4 | 1.9 | 1.4 | 1.7 | 0.59 | 0.87 | 1.1 | 4.0 |
| LKBK-13-10 | 1/2 | 100 | 15,000 | 9.3 | 2.1 | 1.9 | 1.9 | 0.75 | 1.1 | 1.4 | 8.4 |
| LKBK-16-10 | 5/8 | 100 | 22,600 | 12.6 | 2.7 | 2.4 | 2.4 | 0.91 | 1.1 | 1.7 | 13.2 |

*Design factor 4:1

